

CENTUM® SKTC1-127-08

Single-Stage Thermoelectric Cooler Chip



The CENTUM® SKTC1-127-08 is a compact, single-stage thermoelectric cooler delivering up to 98W of cooling power with a 83°C max temperature differential. Measuring 40×40×3.5mm, it operates across -40 to 100°C and features a sealed, solid-state alumina ceramic design for long-term reliability in demanding environments.

Features

- 98 W maximum cooling
- 40×40 mm size
- Silicone-sealed edges
- RoHS compliant construction
- Wide operating temperature range

Applications


- Telecom and RF modules
- Battery thermal management
- Thermal cycling
- Drones/UAVs embedded electronics
- LED lighting systems

Performance Specification Sheet

Hot Side Temperature T_h (°C)	27	50
ΔT_{max} (°C)	74	83
Q_{max} (Watts)	90	98
I_{max} (Amps)	8.8	8.8
V_{max} (DC Volts)	16.8	18.0
R_{AC} (Ω)	1.5	1.62

All performance values fall within $\pm 10\%$ tolerance of tested data and/or models.

Dimensions

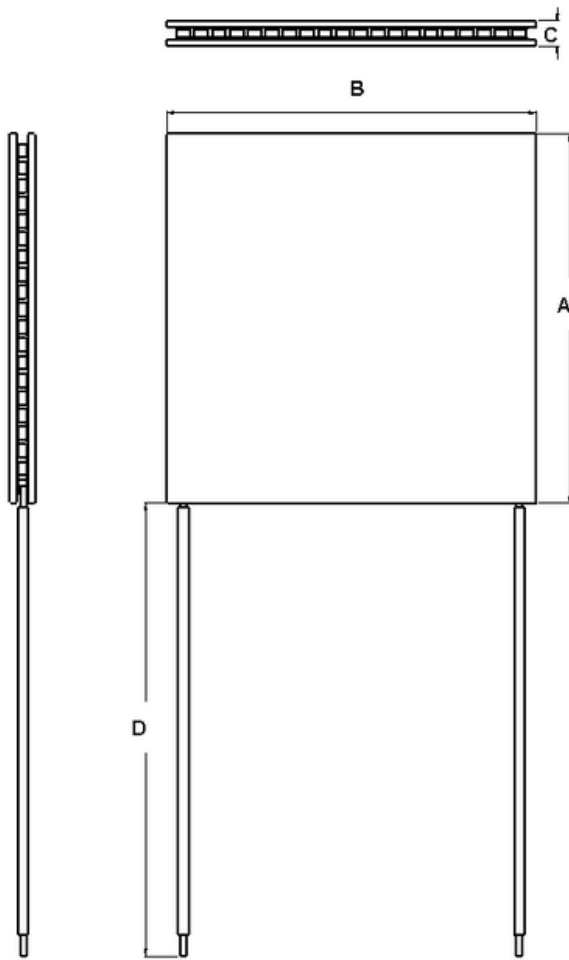


Model #	A
A	40 +/- 0.1 mm
B	40 +/- 0.1 mm
C	3.5 +/- 0.2 mm
D	150 mm


Standard lapping is +/- 0.025 mm

► Performance curves at $T_{hot} = 27^{\circ}\text{C}$


Current vs. Voltage

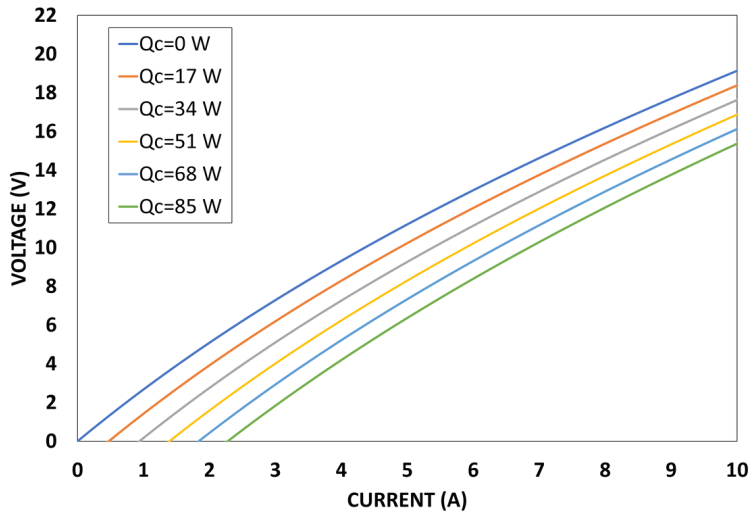


Current vs. Cooling Power

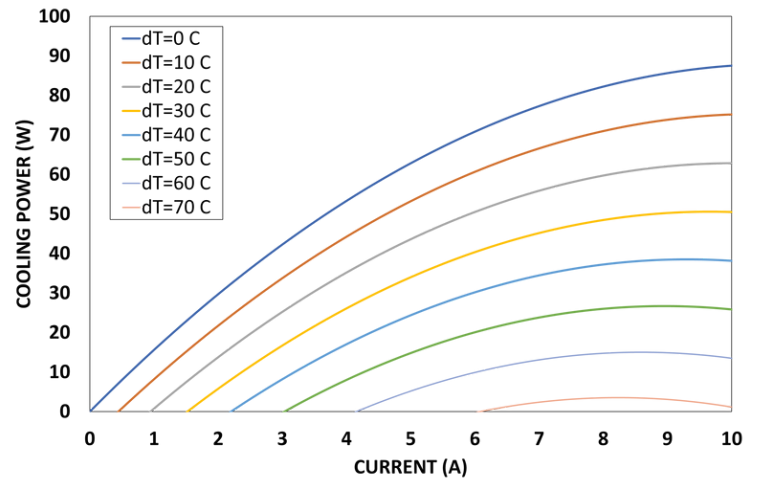

Current vs. Temperature Differential

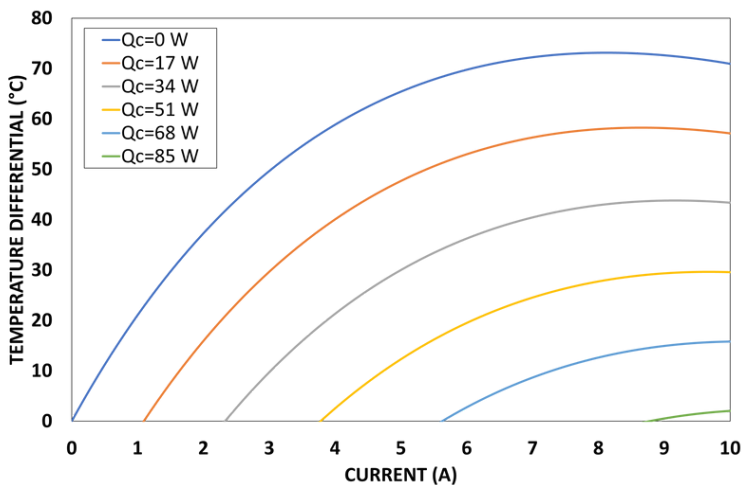


Current vs. COP

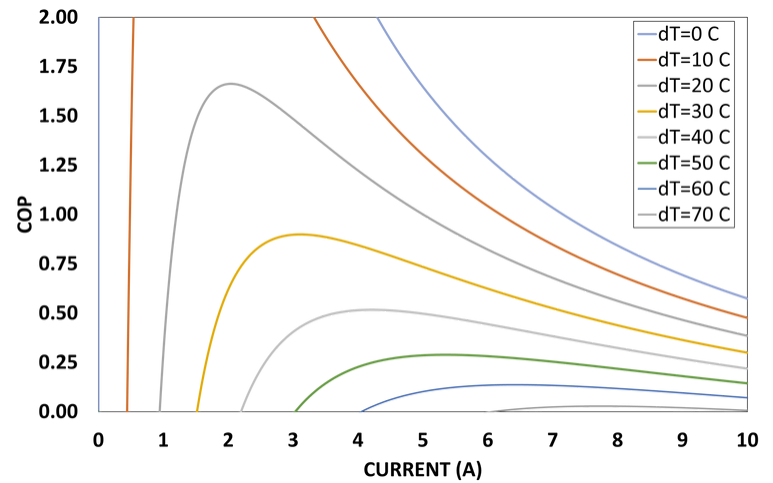


► Performance curves at $T_{hot} = 50^\circ\text{C}$


Current vs. Voltage

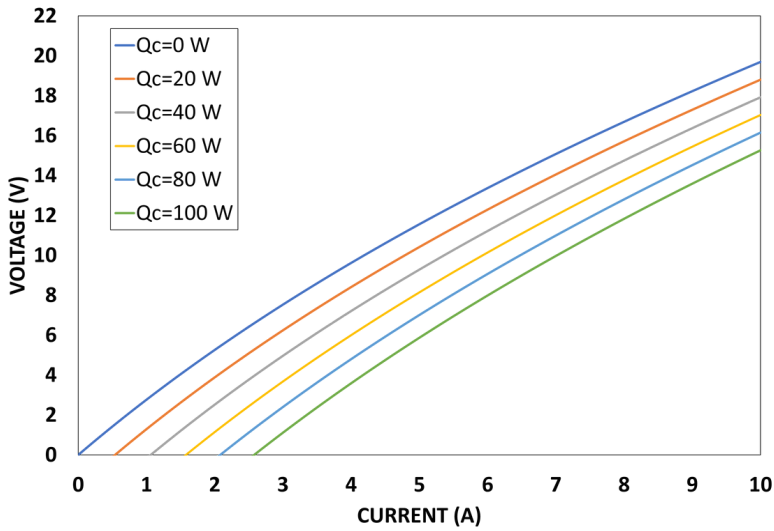


Current vs. Cooling Power

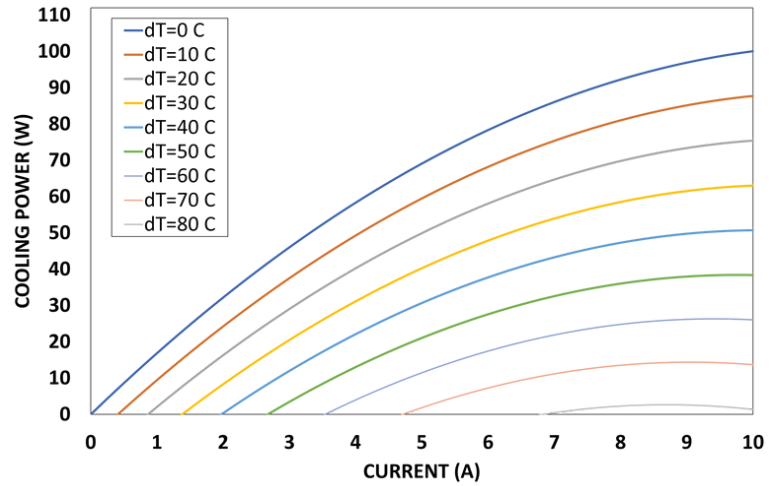

Current vs. Temperature Differential

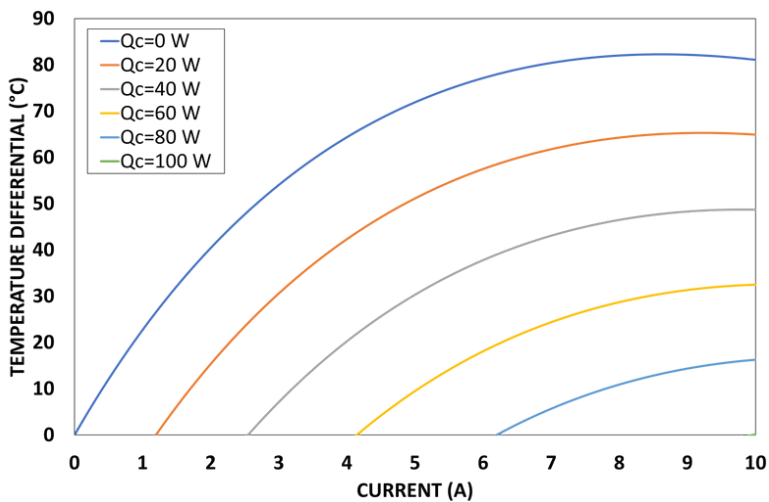

Current vs. COP

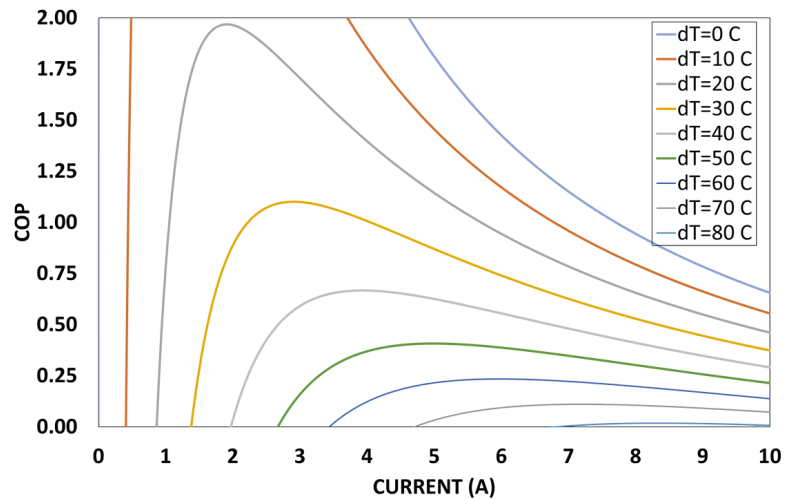

➤ Other Standard Models

Model Number	Dimensions (mm)	T _h (°C)	ΔT _{max} (°C)	Q _{max} (Watts)	I _{max} (Amps)	V _{max} (DC Volts)	R _{AC} (Ω)
SKHC1-17-08	15x15x3.5	27	74	12	8.5	2.2	0.2
SKHC1-31-06	20x20x3.8	27	74	15.3	6	4.1	0.51
SKHC1-31-08	20x20x3.5	27	74	21.7	8.5	4.1	0.36
SKHC1-71-06	30x30x3.8	27	74	39.2	6.3	9.3	1.13
SKHC1-71-08	30x30x3.5	27	74	51.6	8.3	9.3	0.85
SKHC1-127-03	40x40x4.2	27	74	44.6	4.2	16.8	3.03
SKHC1-127-06	40x40x3.8	27	74	66	6.3	16.8	2.05
SKTC1-127-06	40x40x3.8	27	74	66	6.3	16.8	2.05
SKHC1-127-08	40x40x3.5	27	74	87	8.2	16.4	1.5
SKHC1-199-08	40x40x3.6	27	74	147.2	8.8	26.3	2.2
SKHC1-199-16	40x40x3.1	27	74	240.7	14.7	26.3	1.35

» *About Sheetak*

Sheetak is redefining what's possible in thermal management and energy harvesting through advanced thermoelectric technology. With a portfolio of more than 25 issued patents, we design and manufacture high-performance thermoelectric chips that serve a diverse range of applications, from optoelectronics, data centers, and AI hyperscalers to telecom infrastructure, aerospace, and IoT systems.

Headquartered in Austin, Texas, Sheetak brings together deep expertise in material science, device engineering, and scalable manufacturing. By pushing the limits of thermoelectric performance, we help our customers meet today's toughest thermal challenges and enable the systems that power tomorrow.

» *Contact Us*



www.sheetak.com



www.linkedin.com/company/sheetak/



info@sheetak.com



[@SheetakAdvancedThermoelectrics](https://www.youtube.com/@SheetakAdvancedThermoelectrics)

» *Buy Now*



www.digikey.com